
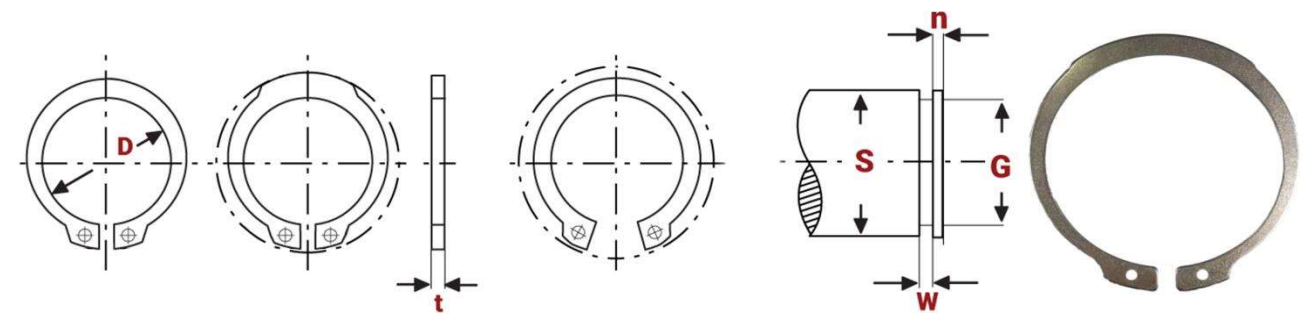


PHE GÀI TRỤC TIÊU CHUẨN DIN 471

Vật liệu	EX10R	THÉP Lò XO 65 Mn (Độ Cứng 44-53 HRC)							
	EX30R	Inox SUS420 (Độ Cứng 36-44 HRC)							
									
Mã hàng		Đường kính S (mm)	Kích thước sản phẩm				Kích thước rãnh trên trục		
Thép	Inox 420		D (mm)		t (mm)		G (mm)	W (mm)	n (Min)
			Min	Max	Min	Max			
EX10R3-04	-	3	2.55	2.74	0.35	0.4	2.8	0.5	0.3
EX10R4-04	EX30R4-04	4	3.55	3.74			3.8		
EX10R5-06	EX30R5-06	5	4.55	4.74			4.8		
EX10R6-07	EX30R6-07	6	5.45	5.64	0.65	0.7	5.7	0.8	0.5
EX10R7-08	EX30R7-08	7	6.32	6.56	0.75	0.8	6.7	0.9	
EX10R8-08	EX30R8-08	8	7.22	7.46			7.6		
EX10R9-10	EX30R9-10	9	8.22	8.46	0.94	1	8.6	1.1	0.6
EX10R10-10	EX30R10-10	10	8.94	9.4			9.6		
EX10R11-10	EX30R11-10	11	9.84	10.3			10.5		0.8
EX10R12-10	EX30R12-10	12	10.64	11.1			11.5		
EX10R13-10	EX30R13-10	13	11.54	12			12.4	1.1	0.9
EX10R14-10	EX30R14-10	14	12.54	13			13.4		
EX10R15-10	EX30R15-10	15	13.44	13.9			14.3	1.1	1.1
EX10R16-10	EX30R16-10	16	14.34	14.8			15.2		
EX10R17-10	EX30R17-10	17	15.34	15.8	1.14	1.2	16.2	1.3	1.2
EX10R18-12	EX30R18-12	18	16.14	16.6			17		
EX10R19-12	EX30R19-12	19	17.14	17.6			18		
EX10R20-12	EX30R20-12	20	18.08	18.63			19		
EX10R21-12	EX30R21-12	21	19.08	19.63			20	1.5	1.5
EX10R22-12	EX30R22-12	22	20.08	20.63			21		
EX10R23-12	EX30R23-12	23	-	21.5			22		
EX10R24-12	EX30R24-12	24	21.78	22.41			22.9		
EX10R25-12	EX30R25-12	25	22.78	23.41	1.44	1.5	23.9	1.7	1.7
EX10R26-12	EX30R26-12	26	23.78	24.41			24.9		
EX10R27-12	EX30R27-12	27	-	24.9			25.6		
EX10R28-15	EX30R28-15	28	25.48	26.11			26.6	1.6	2.1
EX10R29-15	EX30R29-15	29	26.48	27.11			27.6		
EX10R30-15	EX30R30-15	30	27.48	28.11			28.6		
EX10R31-15	EX30R31-15	31	-	28.6			29.3		
EX10R32-15	EX30R32-15	32	29.18	29.6	1.93		30.3		2.6

PHE GÀI TRỤC TIÊU CHUẨN DIN 471


Vật liệu	EX10R	THÉP LÒ XO 65 Mn (Độ Cứng 44-53 HRC)
	EX30R	THÉP KHÔNG GỈ (Độ Cứng 36-44 HRC)

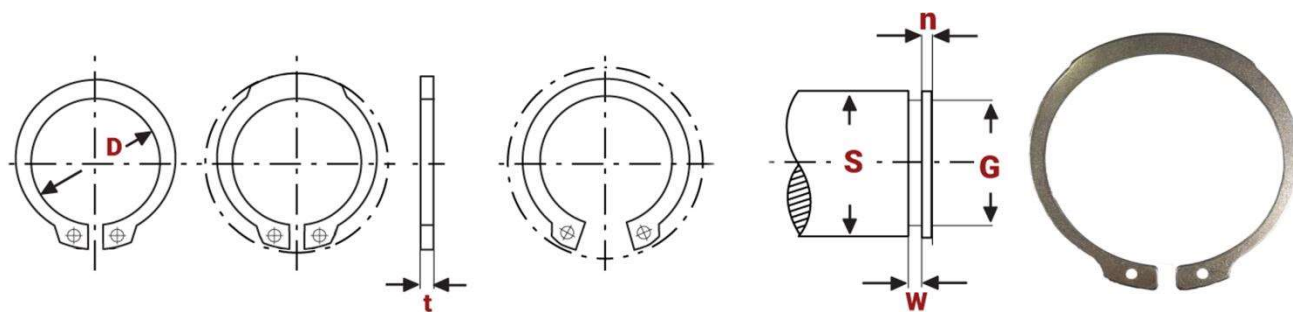

Mã hàng		Đường kính S (mm)	Kích thước sản phẩm				Kích thước rãnh trên trục		
Thép	Inox 420		D (mm)		t (mm)		G (mm)	W (mm)	n (Min)
			Min	Max	Min	Max			
EX10R33-15	EX30R33-15	33	-	30.5	-	1.5	31.3	1.6	1.6
EX10R34-15	EX30R34-15	34	31	31.5	2.43		32.2		
EX10R35-15	EX30R35-15	35	31..7	32.2			33		
EX10R36-175	EX30R36-175	36	-	33.2			1.75	34	1.85
EX10R37-175	EX30R37-175	37	-	34.2		35			
EX10R38-175	EX30R38-175	38	34.7	35.2		36			
EX10R39-175	EX30R39-175	39	-	36		37			
EX10R40-175	EX30R40-175	40	35.6	36.5		37.5		3.8	
EX10R41-175	EX30R41-175	41	-	37.5		38.5			
EX10R42-175	EX30R42-175	42	37.6	38.5		39.5			
EX10R43-175	EX30R43-175	43	-	39.5		40.5			
EX10R44-175	EX30R44-175	44	-	40.5		41.5			
EX10R45-175	EX30R45-175	45	40.6	41.5		42.5			
EX10R46-175	EX30R46-175	46	-	42.5		43.5			
EX10R47-175	EX30R47-175	47	-	43.5		44.5			
EX10R48-175	EX30R48-175	48	43.6	44.5		45.5			
EX10R50-20	EX30R50-20	50	44.9	45.8	2.92	2	47	2.15	4.5
EX10R51-20	EX30R51-20	51	-	46.8			48		
EX10R52-20	EX30R52-20	52	46.9	47.8			49		
EX10R54-20	EX30R54-20	54	-	49.8			51		
EX10R55-20	EX30R55-20	55	49.7	50.8			52		
EX10R56-20	EX30R56-20	56	-	51.8			53		
EX10R57-20	EX30R57-20	57	-	52.8			54		
EX10R58-20	EX30R58-20	58	52.7	53.8			55		
EX10R60-20	EX30R60-20	60	54.7	55.8			57		
EX10R62-20	EX30R62-20	62	-	57.8			-	59	
EX10R63-20	EX30R63-20	63	-	58.8	-	60	2.65		
EX10R65-25	EX30R65-25	65	61.26	60.8	3.9	2.5		62	
EX10R67-25	EX30R67-25	67	-	62.5				64	
EX10R68-25	EX30R68-25	68	-	63.5				65	

PHE GÀI TRỤC TIÊU CHUẨN DIN 471


Vật liệu	EX10R	THÉP LÒ XO 65 Mn (Độ Cứng 44-53 HRC)
	EX30R	THÉP KHÔNG GỈ (Độ Cứng 36-44 HRC)

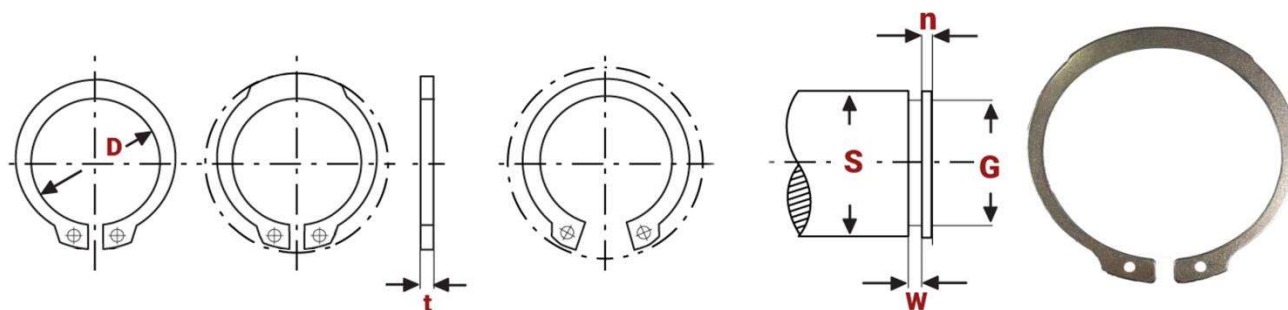

Mã hàng		Đường kính S (mm)	Kích thước sản phẩm				Kích thước rãnh trên trục		
Thép	Inox 420		D (mm)		t (mm)		G (mm)	W (mm)	n (Min)
			Min	Max	Min	Max			
EX10R70-25	EX30R70-25	70	65.96	65.5	3.9	2.5	67	2.65	4.5
EX10R72-25	EX30R72-25	72	-	67.5			69		
EX10R75-25	EX30R75-25	75	70.96	70.5			72		
EX10R77-25	EX30R77-25	77	-	72.5			74		
EX10R78-25	EX30R78-25	78	-	73.5			75		
EX10R80-25	EX30R80-25	80	74.96	74.5			76.5		
EX10R82-25	EX30R82-25	82	-	76.5		78.5	3	3.15	5.3
EX10R85-30	EX30R85-30	85	79.96	79.5		81.5			
EX10R87-30	EX30R87-30	87	-	81.5		83.5			
EX10R88-30	EX30R88-30	88	-	82.5		84.5			
EX10R90-30	EX30R90-30	90	85.04	84.5		86.5			
EX10R92-30	EX30R92-30	92	-	86.5		88.5			
EX10R95-30	EX30R95-30	95	-	89.5		91.5			
EX10R97-30	EX30R97-30	97	-	91.5		93.5			
EX10R98-30	EX30R98-30	98	-	92.5		93.5			
EX10R100-30	EX30R100-30	100	95.04	94.5		96.5			
EX10R102-40	EX30R102-40	102	-	95		4	98	4.15	6
EX10R105-40	EX30R105-40	105	-	98			101		
EX10R107-40	EX30R107-40	107	-	100			103		
EX10R108-40	EX30R108-40	108	-	101			103		
EX10R110-40	EX30R110-40	110	-	103			106		

PHE GÀI TRỤC TIÊU CHUẨN DIN 471


Vật liệu **EX10R** THÉP LÒ XO 65 Mn (Độ Cứng 44-53 HRC)

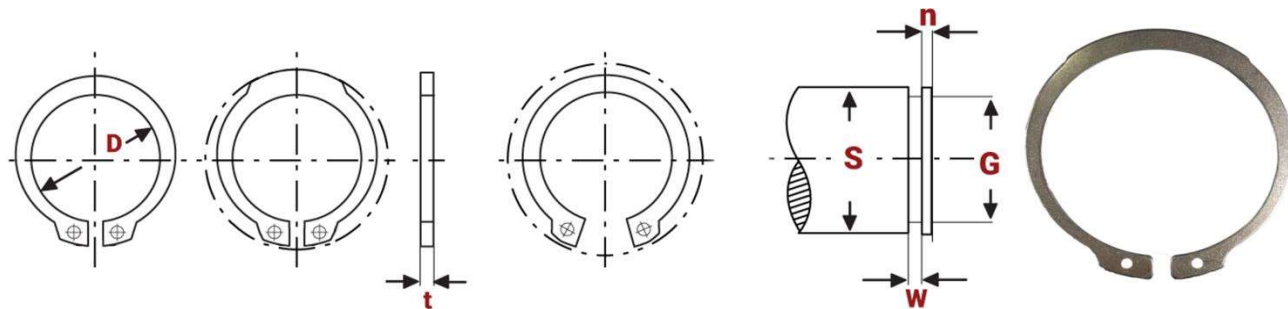

Mã hàng Thép	Đường kính S (mm)	Kích thước sản phẩm				Kích thước rãnh trên trục		
		D (mm)		t (mm)		G (mm)	W (mm)	n (Min)
		Min	Max	Min	Max			
EX10R112-40	112	-	105	3.9	4	108	4.15	6
EX10R115-40	115	106.7	108			111		
EX10R117-40	117	-	110			113		
EX10R118-40	118	-	110			114		
EX10R120-40	120	111.7	113			116		
EX10R122-40	122	-	115			118		
EX10R125-40	125	116.7	118			121		
EX10R127-40	127	-	120			123		
EX10R128-40	128	-	120			124		
EX10R130-40	130	121.5	123			126		
EX10R132-40	132	-	125			128		
EX10R135-40	135	126.5	128			131		
EX10R137-40	137	-	130			133		
EX10R138-40	138	-	130			134		
EX10R140-40	140	131.5	133			136		
EX10R142-40	142	-	135			138		
EX10R145-40	145	136.5	138			141		
EX10R147-40	147	-	140			143		7
EX10R148-40	148	-	140			144		
EX10R150-40	150	140.5	142			145		7.5
EX10R152-40	152	-	143			147		
EX10R155-40	155	144.5	146			150		
EX10R157-40	157	-	148			152		
EX10R158-40	158	-	148			153		
EX10R160-40	160	149.5	151			155		
EX10R165-40	165	154	155.5			160		
EX10R170-40	170	159	160.5			165		

PHE GÀ TRỤC TIÊU CHUẨN DIN 471

Vật liệu **EX10R** THÉP LÒ XO 65 Mn (Độ Cứng 44-53 HRC)

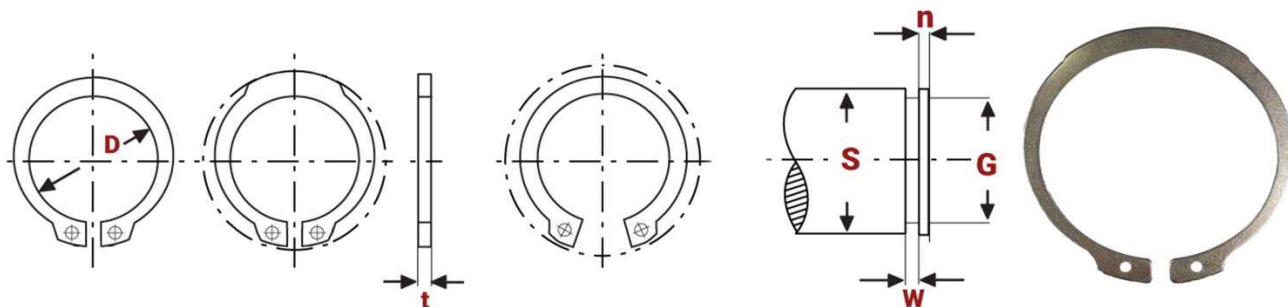

Mã hàng	Đường kính S (mm)	Kích thước sản phẩm				Kích thước rãnh trên trục		
		D (mm)		t (mm)		G (mm)	W (mm)	n (Min)
		Min	Max	Min	Max			
EX10R175-40	175	164	165.5	3.9	4	170	4.15	7.5
EX10R180-40	180	168.9	170.5			175		
EX10R185-40	185	174	175.5			180		
EX10R190-40	190	178.8	180.5			185		
EX10R195-40	195	183.8	185.5			190		
EX10R200-40	200	188.8	190.5			195		
EX10R205-50	205	-	193	4.88	5	199	5.15	9
EX10R210-50	210	196.3	198			204		
EX10R215-50	215	-	203			209		
EX10R220-50	220	206.3	208			214		
EX10R225-50	225	-	213			219		
EX10R230-50	230	216.3	218			224		
EX10R235-50	235	-	223			229		
EX10R240-50	240	226.3	228			234		
EX10R245-50	245	-	233			239		
EX10R250-50	250	236.3	238			244		
EX10R255-50	255	-	240			247		
EX10R260-50	260	243.3	245			252		12
EX10R265-50	265	-	250			257		
EX10R270-50	270	253	255			262		
EX10R275-50	275	-	260			267		
EX10R280-50	280	263	265			272		
EX10R285-50	285	-	270			277		
EX10R290-50	290	273	275			282		
EX10R295-50	295	-	280			287		
EX10R300-50	300	283	285			292		